

# Series 27 Intrinsically Safe Control

- ▶ Cannot Ignite Flammable Materials
- ▶ Solid State Reliability
- ▶ Internal Surge Suppression
- ▶ SPDT Contacts
- ▶ Can Be Used for Single Level or Differential Service

## UL and CSA Approved

Series 27 is UL approved for use in Class I, Groups A, B, C, D; Class II, Groups E, F, G; and Class III hazardous locations. SPDT output contacts. UL Pilot Duty rated.


CSA Certified for Class 1, Groups A, B, C and D; Class II, Groups E, F and G; Class III

## Specifications

<b>Contact Design</b>	1 N.O. & 1 N.C. (1 form C)
<b>Contact Rating (24/120/240VAC)</b>	8 amp Resistive
<b>Mode of Operation</b>	Direct/Inverse, factory set
<b>Sensitivity</b>	0-100K ohm, factory set
<b>Primary Voltage</b>	120 VAC, 240 VAC (+10%/-15%) 50/60Hz
<b>Secondary Voltage</b>	11 VAC, 2.3 mA
<b>Temperature</b>	-40°F to +150°F (-40°C to +65°C)
<b>Approvals</b>	U.L. 913 File # E44570; CSA #2174246
<b>Connections</b>	All screw type connections

## How to Order

Use the **Bold** characters from the chart below to construct a product code.

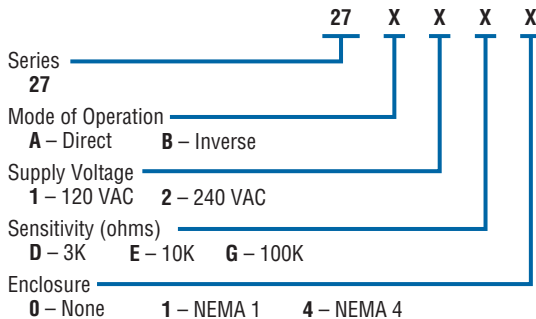

## Applications

- Hazardous Atmospheres
- Pumps
- Waste Treatment
- Alarms
- Sewage
- CP Industry

## Dimensions

