

Racor 900 and 1000

Fuel Filter Water Separator
Priming Pump Installation
For RKP1912 & RKP1924



Turbine Series Fuel Primer Pump Kit is designed for marine, genset, and mobile applications.

Available in 12 volt (RKP1912) and 24 volt (RKP1924). Turbine Series Fuel Primer Pump Kits can be retrofitted to Racor 1000 or 900 Turbine Series fuel filters already in service.

Turbine Series Primer Pumps are designed to offer improved ease of maintenance. Primer pump kits are pre-assembled and include all the components needed for easy installation. Primer pump housings are powder coated and manufactured with premium materials.



Contact Information

Parker Hannifin Corporation
Racor Division
P.O. Box 3208
3400 Finch Road
Modesto, CA 95353

phone **800 344 3286**
209 521 7860
fax **209 529 3278**
racor@parker.com

www.parker.com/racor

Features and Benefits

- Easy installation
- 60 gallons per hour flow rate while in priming mode
- 12 VDC brushed electric motor and pre-screen
- 24 VDC brushless electric motor and pre-screen
- One size fits several models
- Kit includes wiring harness and controller switch
- Allows for electric re-priming of filter and fuel system
- Not for use as continuous duty
- Pump adds only 3.3" to the over all assembly



ENGINEERING YOUR SUCCESS.

How it works

The Fuel Primer Pump Kit is an innovative and proprietary system consisting of a pre-screen filter, a flow bypass circuit and a pump powered by a 12VDC brushed motor or a 24VDC brushless motor.

When the switch is activated the fuel is drawn into the pre-screen and then pumped through the housing refilling the unit with fuel.

When not in use the primer pump system is bypassed and the Racor fuel filter/water separator functions normally.


The Primer Pump Kit works on Racor duplex and triplex systems also. This will allow one Racor primer pump to prime the other filter or filters in a manifold system such as a 751000MAX for example.

Installation


During the installation of the primer kit it is important to replace the check valve spring, located inside the baffle, with the spring provided in the primer pump kit to ensure proper function of the pump. For single turbine housing only one spring will be used, however for duplex units, such as the FHX or MAX, both turbine assemblies will need the spring replaced. Failure to replace (see check ball spring detail diagram) this spring will result in uneven loading of filter elements and perceived filter life reduction.

Installation Instructions Part # 14356

Check Ball and Spring Detail

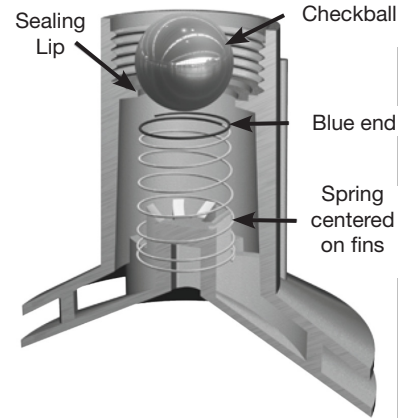

Pre-Screen Kit

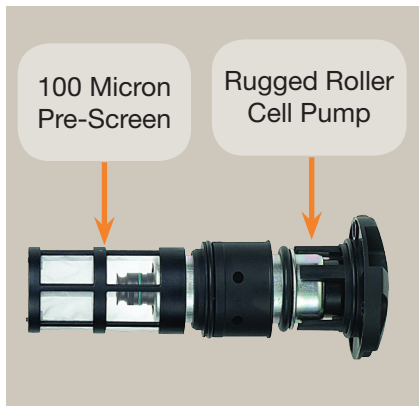

Specifications	RKP1912	RKP1924
Volts DC	12	24
Pump Flow Rate*	29 to 60 GPH (110 to 227 LPH)	60 GPH (227 LPH)
Pump Body	RK22933 (Brushed)	RK23087 (Brushless)
Pre-Screen Kit	RK22934	RK22934
Wire Harness	RK 58091	RK23088
Lid Kit With Vent Plug	RK 11-1933-06	RK 11-1933-06
Vent Plug	RK 10110	RK 10110
Check Ball and Spring	RK11-1978	RK11-1978

* While in priming mode. **RKP1912** Pump Flow Rate will vary based on system design.